

Data sheet


F1612AS

4 pad Ceramic SMD Crystal (1.6 x 1.2 x 0.35 mm)

1.6 x 1.2 x 0.35 mm

FEATURES

- Ultra miniature 4 pad SMD Crystal package
- Ultra thin thickness 0.35mm
- Excellent heat resistance and shock resistance
- Frequency range 24 MHz - 60 MHz (fundamental mode)
- Options for initial stability and temperature tolerance

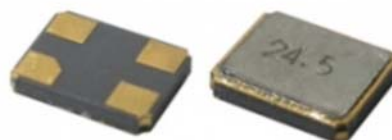

Parameter	min.	typ.	max.	Unit	Condition
Frequency range	24		60	MHz	
Vibration mode	AT cut, fundamental				
Frequency stability					
Initial tolerance @25°C		±30		ppm	See options
vs. operating temperature range		±30		ppm	See options
operating temperature range	-10		+60	°C	See options
Equivalent Series Resistance (ESR)	See table 1				
Load Capacitance (CL)	Series or 8pF to 32pF (see options)				
Shunt Capacitance (Co)			3.5	pF	
Drive Level			50	μW	
Aging			±2	ppm	At 25°C, first year
Insulation Resistance	500			MΩ	@ 100Vdc
Enclosure (see drawing) (LxWxH)	1.6 x 1.2 x 0.35			mm	
Soldering Condition	260°C, 10 sec x 2 max.				
Packing	3,000 pcs./reel				

Table 1 : Standard ESR

Frequency	Mode	ESR
24.0—40.0MHz	Fundamental	150Ω max.
41.0—60.0MHz	Fundamental	100Ω max.

Ordering Code:

Freq. Tolerance @ 25°C	Freq. Stability	Operating Temp. range	Load Capacitance	Mode	Frequency in MHz	ESR if other than STD
10 = ± 10ppm	10 = ± 10ppm	D = -10° / +60°C	Please specify CL	F = Fundamental	Specify the	Specify a value
15 = ± 15ppm	15 = ± 15ppm	E = 0° / +70°C	in pF or S for series		frequency in MHz	in Ω
20 = ± 20ppm	20 = ± 20ppm	F = -20° / +70°C				
25 = ± 25ppm	25 = ± 25ppm	G = -30° / +75°C				
30 = ± 30ppm	30 = ± 30ppm	H = -30° / +85°C				
50 = ± 50ppm	50 = ± 50ppm	K = -40° / +85°C				



Example: F1612AS-20-20-D-30-F-27.000MHz

Data sheet

F1612AS

4 pad Ceramic SMD Crystal (1.6 x 1.2 x 0.35 mm)

Outline Dimensions:

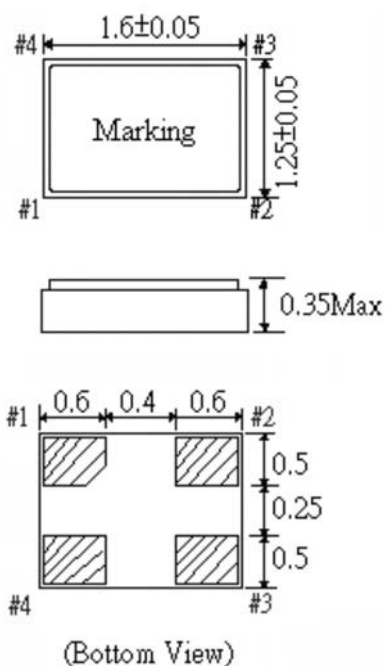

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions (IEC)
Sealing tests (if applicable)	2-17	5.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability	2-20	5.6.3	Test Ta Method 1
Resistance to soldering heat	2-58		Test Td ₁ Method 2 Test Td ₂ Method 2
Shock*	2-27	5.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	5.6.7.1	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Vibration random *	2-64	5.6.7.3	Test Fdb
Endurance tests			
- ageing		5.7.1	30 days @ 85°C, OCXO @25°C
- extended aging		5.7.2	1000h, 2000h, 8000h @85°C

Rev. 9 dated 01-02-2014