

Datasheet

SX2CT HCMOS SURFACE MOUNT TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR


OPTIONS & ORDERING INFORMATION

SX2CT

Supply Voltage	Operating Temp. *	Temperature Stability *	Tri-state Function	Package Type	Frequency in MHz
18 = +1.8V	C = 0° / +50°C	2.5 = ±2.5 ppm	F = No Tri-state	4P = 4-pad version	Please specify the frequency in MHz
25 = +2.5V	D = -10° / +60°C	3.0 = ±3.0 ppm	E1 = Tri-state, pin #1		
28 = +2.8V	F = -20° / +70°C	4.0 = ±4.0 ppm			
30 = +3.0V	G = -30° / +75°C	5.0 = ±5.0 ppm			
33 = +3.3V		2.5 = ±2.5 ppm			

(*) Note : Not all combinations are possible, please consult us.

OUTLINE DIMENSIONS

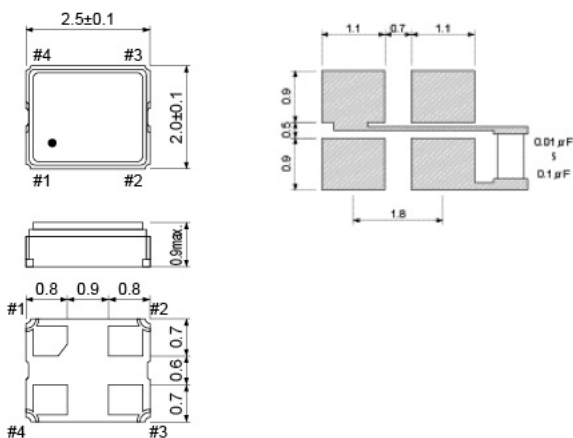

Pin Connections #1 : NC or E/D #2 : GND #3 : Output #4 : Vdd

Rev. 09-2012