

Datasheet


SX5CT

HCMOS SURFACE MOUNT TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR

FEATURES

- Miniature package
- Low cost
- Low current consumption
- Applications: Mobile phones, Portable radio equipment, ...

5.0 x 3.2 x 1.2 mm



Item	Specification					
Frequency Range	4.0 MHz to 54.0 MHz					
Output Logic	CMOS					
Supply Voltage Vdd (see options)		+1.8 V ±5%	+2.5 V ±5%	+2.8 V ±5%	+3.0 V ±5%	+3.3 V ±5%
Supply Current Idd	4 ~ 10 MHz	3.1 mA max.	3.1 mA max.	3.4 mA max.	3.4 mA max.	4.0 mA max.
	~ 20 MHz	3.7 mA max.	3.7 mA max.	4.1 mA max.	4.1 mA max.	4.8 mA max.
	~ 30 MHz	4.2 mA max.	4.2 mA max.	4.7 mA max.	4.7 mA max.	5.5 mA max.
	~ 40 MHz	4.6 mA max.	4.6 mA max.	5.2 mA max.	5.2 mA max.	6.0 mA max.
	~ 54 MHz	5.5 mA max.	4.8 mA max.	6.0 mA max.	6.0 mA max.	7.0 mA max.
Frequency Tolerance	±0.5 ppm at 25°C ±2°C					
Frequency Stability vs Temperature (see options)		±2.5 ppm	±3.0 ppm	±4.0 ppm	±5.0 ppm	
	0° to +50°C	o	o	o	o	
	-10° to +60°C	o	o	o	o	
	-20° to +70°C	o	o	o	o	
	-30° to +75°C	o	o	o	o	
	o = availabe					
Frequency Stability vs Aging	±1.0 ppm max. per year at 25°C					
Frequency Stability vs Voltage Change	±0.3 ppm max., for a ±5% input voltage change					
Frequency Stability vs Load Change	±0.3 ppm max., for a ±10% load condition change					
Output Level	VOH ≥ 0.9 Vdd		VOL ≤ 0.1 Vdd			
Output Load	15 pF					
Symmetry	45 / 55%					
Rise Time / Fall Time Fr / Ff	5 ns max.					
Tri-state Function	pin #1 = high or open pin #1 = low			pin #3 ==> oscillation pin #3 ==> high impedance		
Start-up Time	5 ms typ., 10 ms max.					
RMS Jitter (12 kHz to 20 MHz band)	1 ps max.					
Phase noise	-145 dBc/Hz typ. at 10 kHz offset					
Packing Unit	1000 pcs / reel					
Soldering Conditions	260°C, 10 sec x2 max					

Customer specifications on request

Rev. 09-2012

Datasheet

SX5CT HCMOS SURFACE MOUNT TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR


OPTIONS & ORDERING INFORMATION

SX5CT

Supply Voltage	Operating Temp. *	Temperature Stability *	Tri-state Function	Package Type	Frequency in MHz
18 = +1.8V	C = 0° / +50°C	2.5 = ±2.5 ppm	F = No Tri-state	4P = 4-pad version	Please specify the frequency in MHz
25 = +2.5V	D = -10° / +60°C	3.0 = ±3.0 ppm	E1 = Tri-state, pin #1		
28 = +2.8V	F = -20° / +70°C	4.0 = ±4.0 ppm			
30 = +3.0V	G = -30° / +75°C	5.0 = ±5.0 ppm			
33 = +3.3V					

(*) Note : Not all combinations are possible, please consult us.

OUTLINE DIMENSIONS

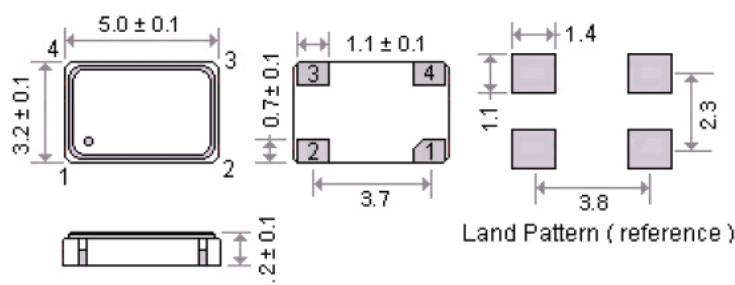

Pin Connections #1 : NC or E/D #2 : GND #3: Output #4 : Vdd

Rev. 09-2012