


AXIOM75ULN

Ultra-Low Phase Noise OCXO with Sine Wave Output

FEATURES

- Through Hole Package, size 25.8 x 25.8 x 12.7 mm
- Ultra-Low Phase Noise OCXO
- Sine Wave Output +7 dBm (R 50Ω)
- Standard Frequencies : 100.0 / 120.0 MHz

25.8 x 25.8 x 12.7 mm max.



Parameter	min.	typ.	max.	Unit	Condition
Frequency Range	80		125		
Standard frequencies	100.000 / 120.000			MHz	
Frequency stability					
Initial tolerance at delivery			± 300	ppb	@+25°C @V _C = V _{REF} /2
vs. operating temperature range	Option 2 & 3 See tables 2 & 3				Steady state
vs. supply voltage variation (pushing)			± 10	ppb	V _S ± 5%
vs. load change (pulling)			± 5	ppb	R _L ± 5%
Long term (aging) per day		± 1	± 2	ppb	After 30 days operation
long term (aging) 1 st year		± 100	± 200	ppb	After 30 days operation
Frequency adjustment range					
Electronic Frequency Control (EFC)	± 1	± 2		ppm	
EFC voltage V _C	0	V _{REF} /2	V _{REF}	V	
EFC slope (Δf / ΔV _C)	positive				
EFC input impedance	100			kΩ	
RF output					
Signal waveform	Sine wave				
Load R _L	50			Ω	
Output level (Note 2)	+ 7			dBm	
Harmonics			-30	dBc	
Spurious			-90	dBc	
Warm-up time		3	5	min	Δf _{final} /f ₀ < ±0.1 ppm
Phase noise @ 100 MHz and 120 MHz	See table 1				Option 1
G-Sensitivity			1.0	ppb/g	per axis
Reference voltage VREF output (Note 3)		10.0		V	
Supply voltage V_S	11.4	12	12.6	V	
Current consumption (steady state)			150	mA	@ +25°C (Note 4)
Current consumption (warm-up)			350	mA	(Note 4)
Enclosure (see drawing) (LxWxH)	25.8x25.8x12.7max.			mm	IEC 60679-3 CO 43
Weight			20	gram	
Packing	Palette				

Notes:

1. Terminology and test conditions are according to IEC standard IEC60679-1 and MIL-PRF-55310, unless otherwise stated
2. Other output level on request
3. Other supply and reference voltage on request
4. May be higher for wide operating temperature range

AXIOM75ULN

Ultra-Low Phase Noise OCXO with Sine Wave Output

Absolute Maximum Ratings:

Parameter	Min.	Max.	Unit	Condition
Supply Voltage Vs	-0.5	Vs + 10%	V	Vs to GND
Control Voltage Vc	-0.5	15	V	Vc to GND
Storage Temperature	-55	+125	°C	

Phase Noise - Option 1:

Offset	100 MHz					120 MHz					Unit
	A	B	C	D	E	A	B	C	D	E	
10 Hz	-90	-95	-97	-100	-105	-85	-90	-95	-97	-100	dBc/Hz
100 Hz	-125	-130	-132	-135	-137	-118	-122	-125	-127	-130	dBc/Hz
1 kHz	-155	-158	-160	-162	-164	-148	-150	-153	-155	-157	dBc/Hz
10 kHz	-165	-168	-170	-172	-174	-160	-165	-168	-170	-172	dBc/Hz
≥100 kHz	-175	-175	-175	-175	-175	-175	-175	-175	-175	-175	dBc/Hz

Table 1

Frequency stability vs. temperature

Option 2	Stability
	[ppb]
05	±5
10	±10
25	±25
50	±50
100	±100
200	±200

Table 2

Lower Temperature		Upper Temperature	
Option 3	T [°C]	Option 3	T [°C]
0	0	A	+50
1	-10	B	+60
2	-20	C	+70
3	-30	D	+75
4	-40	E	+80
5	-55	F	+85

Table 3

Standard: "1B" = -10°C to +60°C

Temperature range [°C]	Frequency stability [Option 2]					
	05	10	25	50	100	200
0 ~ +50	O	X	X	X	X	X
-10 ~ +60	O	X	X	X	X	X
-20 ~ +70	O	X	X	X	X	X
-30 ~ +70	O	O	X	X	X	X
-40 ~ +75	-	O	X	X	X	X
-40 ~ +85	-	-	O	X	X	X
-55 ~ +85	-	-	O	X	X	X

Table 4 "Availability"

X = available, O = available on request, - = not available

Ordering Code:



Model (Specification)	Option 1 [Phase Noise]	Option 2 [Stability]	Option 3 [Temperature range]	Revision	Frequency [MHz]
AXIOM75ULN	Table 1	Table 2	Table 3	Rev.3	100.000

Example: AXIOM75ULN-C-25-1B_Rev.3-100.000 MHz

AXIOM75ULN


Ultra-Low Phase Noise OCXO with Sine Wave Output

Enclosure drawing

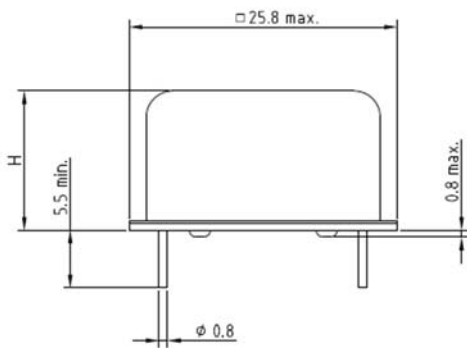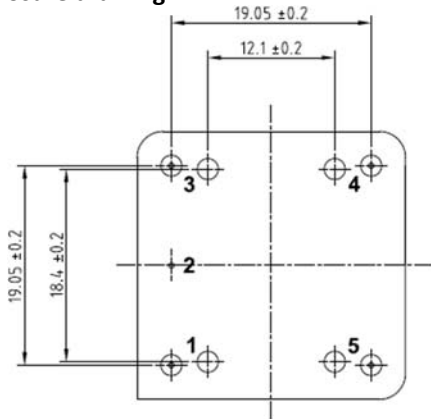

Pin connections

Pin #	Symbol	Function
1	RF OUT	RF Output
2	GND	Ground, case
3	V _c	Control Voltage (EFC)
4	VREF	Reference Voltage
5	V _s	Supply Voltage

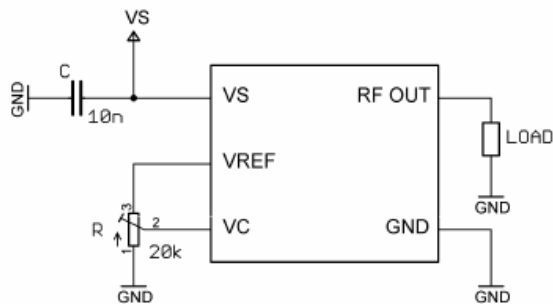

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	MIL-STD-202G Method	MIL-STD-810F Method	MIL-PRF-55310D Clause	Test conditions (IEC)
Sealing tests (if applicable)	2-17	5.6.2	112E		3.6.1.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability	2-20	5.6.3	208H		3.6.52	Test Ta Method 1
Resistance to soldering heat	2-58		210F		3.6.48	Test Td ₁ Method 2 Test Td ₂ Method 2
Shock*	2-27	5.6.8	213B	516.4	3.6.40	Test Ea, 3 x per axes 100g, 11 ms half-sine pulse
Vibration, sinusoidal*	2-6	5.6.7.1	201A 204D	516.4-4	3.6.38.1 3.6.38.2	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Vibration, random*	2-64	5.6.7.3	214A	514.5	3.6.38.3 3.6.38.4	Test Fdb
Altitude						70 000 ft
Humidity						95% R.H. @ +65°C
RF radiation from case						< -80 dBc (MIL-STD-461F)
Endurance tests			108A			
- ageing		5.7.1			4.8.35	30 days @ 85°C, OCXO @25°C
- extended aging		5.7.2				1000h, 2000h, 8000h @85°C