

Datasheet

DLCT HCMOS TRU-HOLE TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR

FEATURES

- Thru-hole DIL14 package
- Wide frequency range
- Mechanical trimmer option
- Applications: Base Stations, Test equipment, ...

20.7 x 13.1 x 5.08 mm

20.7 x 13.1 x 7.48 mm



Item	Specification						
Frequency Range	1.0 MHz to 125.0 MHz						
Output Logic	CMOS						
Supply Voltage V _{dd} (see options)	+3.3 V ±5%		+5.0 V ±5%				
Supply Current I _{dd}	40.0 mA max., frequency dependent						
Frequency Tolerance (see options)	With trimmer option: ±1.0 ppm at 25°C ±2°C (one hour after reflow) Without trimmer option: ±2.0 ppm at 25°C ±2°C (one hour after reflow)						
Frequency Stability vs Temperature (see options)		±0.5 ppm	±1.0 ppm	±1.5 ppm	±2.0 ppm	±2.5 ppm	±3.0 ppm
	0° to +50°C	o	o	o	o	o	o
	-10° to +60°C	◇	o	o	o	o	o
	-20° to +70°C	x	o	o	o	o	o
	-30° to +75°C	x	◇	o	o	o	o
	-30° to +85°C	x	◇	◇	o	o	o
	-40° to +85°C	x	◇	◇	o	o	o
	o = available		◇ = please contact us		x = not available		
Frequency Stability vs Aging	±1.0 ppm max. per year at 25°C						
Frequency Stability vs Voltage Change	±0.3 ppm max., for a ±5% input voltage change						
Frequency Stability vs Load Change	±0.3 ppm max., for a ±10% load condition change						
Output Level	VOH ≥ 0.9 V _{dd}			VOL ≤ 0.1 V _{dd}			
Output Load	15 pF						
Symmetry	45 / 55%						
Rise Time / Fall Time Fr / Ff	10 ns max.						
Start-up Time	5 ms typ., 10 ms max.						
Phase noise	Offset / dBc / Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	
	(typical)						
	10.000 MHz	-95 dBc / Hz	-130 dBc / Hz	-140 dBc / Hz	-145 dBc / Hz	-150 dBc / Hz	
20.000 MHz	-80 dBc / Hz	-120 dBc / Hz	-135 dBc / Hz	-140 dBc / Hz	-145 dBc / Hz		
Mechanical Frequency Tuning (see options)	±3.0 ppm min. tuning						
Packing Unit	100 pcs / box						

Customer specifications on request

Datasheet

DLCT HCMOS TRU-HOLE TEMPERATURE COMPENSATED CRYSTAL CLOCK OSCILLATOR


OPTIONS & ORDERING INFORMATION

DLCT

Supply Voltage	Operating Temp. *	Temperature Stability *	Tri-state Function	Package height	Frequency in MHz	Mechanical Tuning
33 = +3.3V	C = 0° / +50°C	0.5 = ±0.5 ppm	F = No Tri-state	H1 = 5.08 mm	Please specify the frequency in MHz	Blanc = No trimmer
50 = +5.0V	D = -10° / +60°C	1.0 = ±1.0 ppm		H2 = 7.48 mm		-T = Trimmer option
	F = -20° / +70°C	1.5 = ±1.5 ppm				
	G = -30° / +75°C	2.0 = ±2.0 ppm				
	H = -30° / +85°C	2.5 = ±2.5 ppm				
	K = -40° / +85°C	3.0 = ±3.0 ppm				

(*) Note : Not all combinations are possible, please consult us.

OUTLINE DIMENSIONS

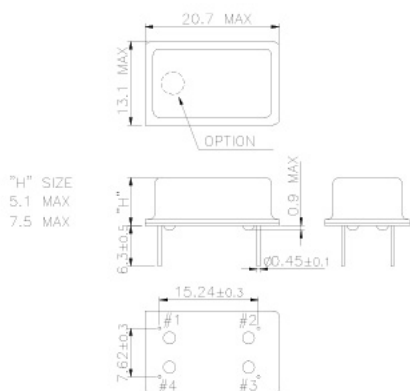

Pin Connections

#1 : NC

#2 : GND

#3: Output

#4 : Vdd

Rev. 09-2012