

**Datasheet**
**DLST**
**CLIPPED SINE WAVE THRU-HOLE TCXO**
**FEATURES**

20.7 x 13.1 x 7.48 mm

- Thru-hole DIL14 package
- Wide frequency range
- Adjustable Frequency
- Applications: Base Stations, Test equipment, ...



Item	Specification						
Frequency Range	1.0 MHz to 64.0 MHz						
Output Logic	Clipped Sine Wave						
Supply Voltage V <sub>dd</sub> (see options)	+3.3 V ±5%		+5.0 V ±5%				
Supply Current I <sub>dd</sub>	10 mA max		15 mA max				
Frequency Tolerance	±1.0 ppm max. at 25°C ±2°C (one hour after reflow)						
Frequency Stability vs Temperature (see options)		±0.5 ppm	±1.0 ppm	±1.5 ppm	±2.0 ppm	±2.5 ppm	±3.0 ppm
	0° to +50°C	o	o	o	o	o	o
	-10° to +60°C	◇	o	o	o	o	o
	-20° to +70°C	x	o	o	o	o	o
	-30° to +75°C	x	◇	o	o	o	o
	-30° to +85°C	x	◇	◇	o	o	o
	-40° to +85°C	x	◇	◇	o	o	o
	o = available		◇ = please contact us		x = not available		
Frequency Stability vs Aging	±1.0 ppm max. per year at 25°C						
Frequency Stability vs Voltage Change	±0.2 ppm max., for a ±5% input voltage change						
Frequency Stability vs Load Change	±0.2 ppm max., for a ±10% load condition change						
Output Level	≥0.8 V p-p						
Output Load	10 kΩ // 10 pF						
Start-up Time	3 ms max.						
Phase noise	Offset / dBc / Hz (typical)	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	
	10.000 MHz	-95 dBc / Hz	-130 dBc / Hz	-140 dBc / Hz	-145 dBc / Hz	-150 dBc / Hz	
	38.880 MHz	-85 dBc / Hz	-110 dBc / Hz	-140 dBc / Hz	-150 dBc / Hz	-150 dBc / Hz	
Mechanical Frequency Tuning (see options)	±3.0 ppm min. tuning						
Packing Unit	100 pcs / box						

**Customer specifications on request**
**OPTIONS & ORDERING INFORMATION**
**DLST**

Supply Voltage	Operating Temp. *	Temperature Stability *	Tri-state Function	Package type	Frequency in MHz	Mechanical Tuning
<b>33</b> = +3.3V	<b>C</b> = 0° / +50°C	<b>0.5</b> = ±0.5 ppm	<b>F</b> = No Tri-state	<b>4P</b> = 4-pad version	Please specify the frequency in MHz	<b>Blanc</b> = No trimmer
<b>50</b> = +5.0V	<b>D</b> = -10° / +60°C	<b>1.0</b> = ±1.0 ppm				<b>-T</b> = Trimmer option
	<b>F</b> = -20° / +70°C	<b>1.5</b> = ±1.5 ppm				
	<b>G</b> = -30° / +75°C	<b>2.0</b> = ±2.0 ppm				
	<b>H</b> = -30° / +85°C	<b>2.5</b> = ±2.5 ppm				
	<b>K</b> = -40° / +85°C	<b>3.0</b> = ±3.0 ppm				


(\*) Note : Not all combinations are possible, please consult us.

**Datasheet**

**DLST**

**CLIPPED SINE WAVE THRU-HOLE TCXO**

**OUTLINE DIMENSIONS (mm)**

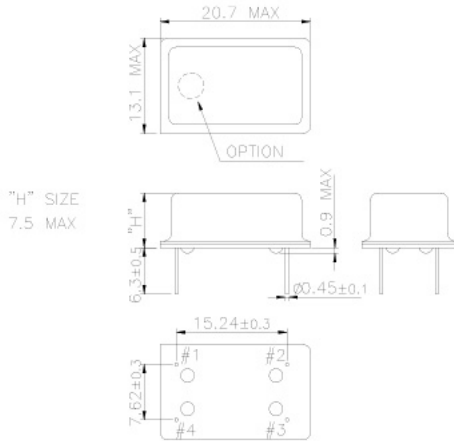

**Pin Connections**

**#1 : NC**

**#2 : GND**

**#3: Output**

**#4 : Vdd**