

Data sheet

F3215

32.768KHz 2 pad SMD Crystal (3.2x1.5x0.9mm)

FEATURES

- Miniature Ceramic SMD package, 2 pad (Reflow is possible)
- Temperature range -40/+85°C (Industrial Applications)
- Ultra-thin thickness 0.9mm
- Excellent aging characteristics
- Applications: Wireless, Commercial and Industrial equipment...



Parameter	min.	typ.	max.	Unit	Condition
Frequency		32.768		KHz	
Vibration mode	XY-cut				
Frequency stability					
Initial tolerance @25°C	±20, ±50			ppm	
Operating temperature range	-40		+85	°C	
Turnover temperature	25°C ±5 °C				
Parabolic curvature constant	-0.045x10 ⁻⁶ /°C ² max.				
Equivalent Series Resistance (ESR)	80KΩ max.				
Load Capacitance (CL)	Standard: 12.5pF (9pF optional)				
Shunt Capacitance (Co)			2.0	pF	
Drive Level			0.1	μW	
Aging			±3	ppm	At 25°C, first year
Insulation Resistance	500			MΩ	@ 100Vdc
Enclosure (see drawing) (LxWxH)	3.2 x 1.5 x 0.9			mm	
Packing	3000 pcs per reel				

Ordering Code:

Tolerance	Load Capacitance
20 = ±20ppm	12.5 = 12.5pF
50 = ±50ppm	9 = 9pF

Standard specifications:

- ± 50ppm
- 12.5pF


Example: F3215-50-9

Data sheet

F3215

32.768KHz 2 pad SMD Crystal (3.2x1.5x0.9mm)

Outline Dimensions (mm):

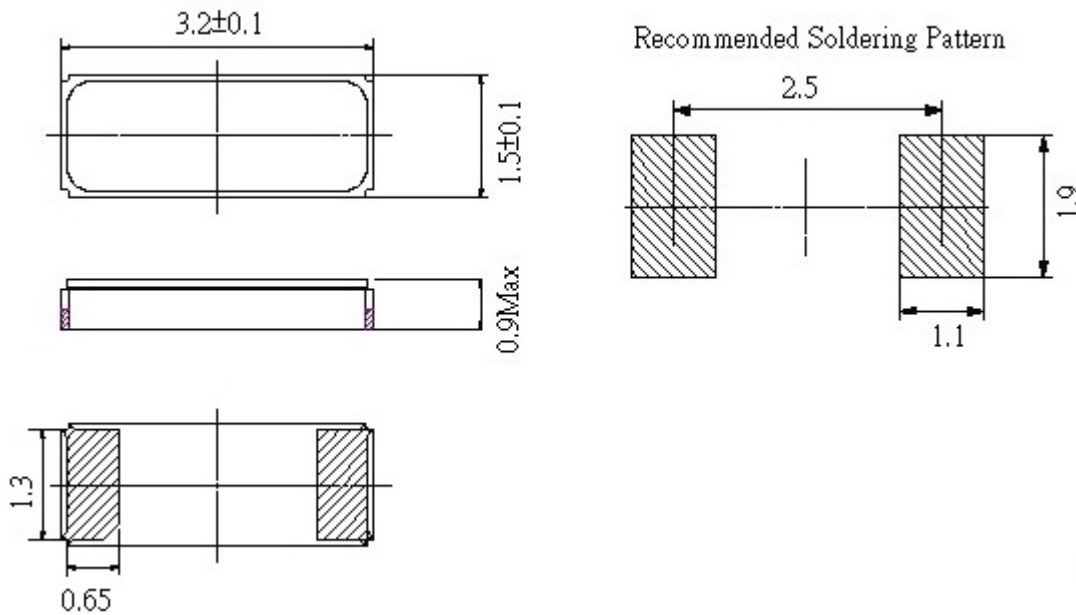

Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 clause ...	Test conditions (IEC)
Sealing tests (if applicable)	2-17	5.6.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability	2-20	5.6.3	Test Ta Method 1
Resistance to soldering heat	2-58		Test Td ₁ Method 2 Test Td ₂ Method 2
Shock*	2-27	5.6.8	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	5.6.7.1	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Vibration random *	2-64	5.6.7.3	Test Fdb
Endurance tests			
- ageing		5.7.1	30 days @ 85°C, OCXO @25°C
- extended aging		5.7.2	1000h, 2000h, 8000h @85°C

Rev. 2 dated 01-02-2013