

## Datasheet


### SX3CB

### HCMOS SURFACE MOUNT CRYSTAL CLOCK OSCILLATOR

## FEATURES

- Ultra-miniature package
- Low voltage
- Low current
- Applications: Wireless communications, Portable electronics, Fibre Channel,...

3.2 x 2.5 x 1.1 mm

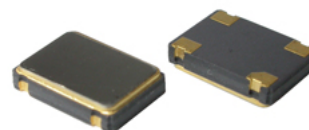

Item	Specification	
Frequency Range	1.5 MHz ~ 54.0 MHz	
Output Logic	CMOS	
Overall Frequency Stability *	± 20 ppm ~ ± 100 ppm (see options)	
Operating Temperature Range	0 ~ +70 °C commercial application (see options) -40 ~ +85 °C industrial application (see options)	
Supply Voltage Vdd	+1.2V ±5%	+1.5V ±5%
Supply Current Idd	4 mA max	5 mA max
Output Level	VOH ≥ 0.9 Vdd	VOL ≤ 0.1 Vdd
Output Load	15 pF	
Symmetry	45 / 55 %	
Rise Time / Fall Time Fr/Ff	3 ~ 8 ns	
Tri-state function	pin #1 = high or open pin #1 = low	pin #3 = oscillation pin #3 = high impedance
Start-up Time	10 ms max.	
RMS Jitter (12 kHz to 20 MHz band)	1 ps max.	
Packing Unit	3000pcs / reel	
Soldering Condition	260 °C , 10 sec x2 max	

**Customer specifications on request**

(\*) Includes initial tolerance @+25 °C, stability over operating temperature, stability vs. load change, stability vs. supply change and one year aging

## OPTIONS & ORDERING INFORMATION

SX3CB .....	.....	.....	.....	.....	..... MHz
Supply Voltage *	Operating Temp. *	Overall Stability *	Tri-state Function	Output Load *	Frequency in MHz
12 = +1.2V	E = 0 ° / +70 °C	20 = ±20 ppm	E = Tri-state	Blanc = 15 pF	Please specify the frequency in MHz
15 = +1.5V	F = -20 ° / +70 °C	25 = ±25 ppm			
	K = -40 ° / +85 °C	30 = ±30 ppm			
		50 = ±50 ppm			
		100 = ±100 ppm			


(\*) Note : Not all combinations are possible, please consult us.

**Datasheet**

**SX3CB**

**HCMOS SURFACE MOUNT CRYSTAL CLOCK OSCILLATOR**

**OUTLINE DIMENSIONS**

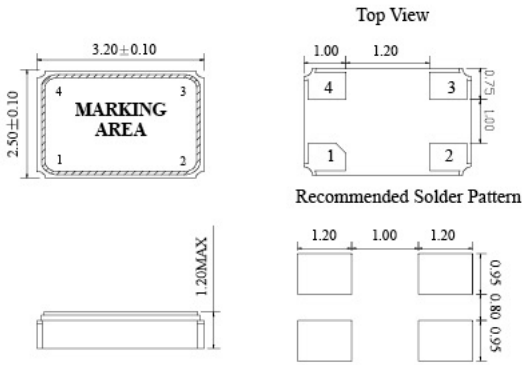

**Pin Connections**

**#1 : E/D**

**#2 : GND**

**#3: Output**

**#4 : Vdd**