

## Datasheet


### SX7CB

### HCMOS SURFACE MOUNT CRYSTAL CLOCK OSCILLATOR

## FEATURES

- SMD package
- Low voltage
- Low current
- Applications : PC main boards, Portable electronics, Wireless LAN....

7.0 x 5.0 x 1.4 mm

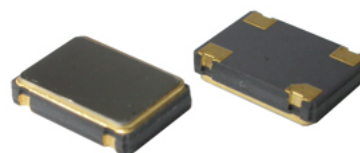

Item	Specification	
Frequency Range	0.5 MHz ~160.0 MHz	
Output Logic	CMOS	
Overall Frequency Stability*	±20 ppm ~ ±100 ppm (see options)	
Operating Temperature Range	0 ~ +70°C commercial application (see options) -40 ~ +85°C industrial application (see options)	
Supply Voltage Vdd	+1.2V ±5%	+1.5V ±5%
Supply Current Idd	4 mA max	5 mA max
Output Level	VOH ≥ 0.9 Vdd	VOL ≤ 0.1 Vdd
Output Load	15 pF	
Symmetry	45/55%	
Rise Time / Fall Time Fr/Ff	2 ~ 8 ns	
Tri-state function	pin #1 = high or open pin #1 = low	pin #3 ==> oscillation pin #3 ==> high impedance
Start-up Time	10 ms max.	
RMS Jitter (12 kHz to 20 MHz band)	1 ps max.	
Packing Unit	1000 pcs/reel	
Soldering Condition	260°C, 10 sec x 2max	

Customer specifications on request

(\*) Includes initial tolerance @+25°C, stability over operating temperature, stability vs. load change, stability vs. supply change and one year aging

## OPTIONS & ORDERING INFORMATION


Supply Voltage	Operating Temp. *	Overall Stability *	Tri-state Function	Output Load *	Frequency in MHz
12 = +1.2V	E = 0°/+70°C □	20 = ±20 ppm	E = Tri-state	Blanc = 15pF	Please specify the frequency in MHz
15 = +1.5V	F = -20°/+70°C	25 = ±25 ppm			
	K = -40°/+85°C	30 = ±30 ppm			
		50 = ±50 ppm			
		100 = ±100 ppm			

\* Note : Not all combinations are possible, please consult us.

### SX7CB

### HCMOS SURFACE MOUNT CRYSTAL CLOCK OSCILLATOR

## OUTLINE DIMENSIONS

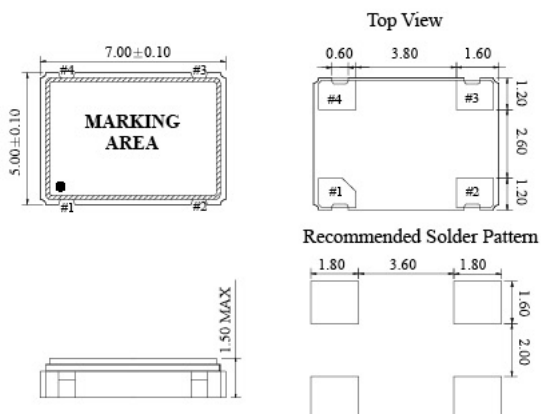

#### Pin Connections

#1 : E/D

#2 : GND

#3: Output

#4 : Vdd